

BRITAX MAŽI IŠORINIAI BALKINIAI LED ŠVYTURĖLIAI

1. Britax low profile mini LED light bar ECE R65 – A511.00.LDV



Overview

Item	Amber micro LED light bar with amber lens and single bolt fitting
Category	Lightbars
Description	R65 approved Low profile micro lightbar. Amber lens with clear Led's single bolt fixing
Key Features	High intensity LED Water resistant design 23 selectable flash patterns Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A511.00.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 4.2A
Fitting method	Single bolt	Current draw at 24v	Peak 1.05A
Lens colour	Amber		
Warranty	5 years	Height(incl bracket)	79mm
Approval	ECE R65	Length	248mm

2. Britax low profile mini LED light bar – A504.00.LDV.KIT



Overview

Item	Amber micro LED light bar with uncoloured lens and magnetic fitting and free carry case
Category	Light bars
Description	Low profile micro lightbar. Uncoloured lens with amber Led's magnetic fixing and free carry case
Key Features	<ul style="list-style-type: none"> High intensity LED Waterproof design 23 selectable flash patterns 100,000 hours Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A504.00.LDV.KIT	Voltage	Dual Voltage
Brand	Britax	Current draw at 12v	Peak 4.2A
Fitting method	Magnetic	Current draw at 24v	Peak 1.05A
Lens colour	Uncoloured		

Warranty	5 years	Height(incl magnets)	50mm
Approval	Non ECE R65	Length	248mm
EMC Approval	EMC 10.04	Depth	172mm

3. Britax low profile mini LED light bar – A501.00.LDV



Overview

Item	Amber micro LED light bar with uncoloured lens and single bolt fitting
Category	Light bars
Description	Low profile micro lightbar. Uncoloured lens with amber Led's single bolt fixing
Key Features	<ul style="list-style-type: none"> High intensity LED Waterproof design 23 selectable flash patterns Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A501.00.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 4.2A
Fitting method	Single bolt	Current draw at 24v	Peak 1.05A
Lens colour	Uncoloured		

Warranty	5 years	Height(incl bracket)	79mm
Approval	Non ECE R65	Length	248mm
EMC Approval	EMC 10.03	Depth	172mm

4. Britax low profile mini LED light bar – A101.00.LDV



Overview

Item	Amber micro LED light bar with uncoloured lens and single bolt fixing
Category	Light bar
Description	low profile mini light bar. Uncoloured lens with amber LEDs. Single bolt fixing.
Key Features	<ul style="list-style-type: none"> High intensity LED end modules Double flash Waterproof design Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A101.00.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Single bolt	Current draw at 24v	Peak 1.0A
Lens colour	Uncoloured		

Warranty	5 years	Height	96mm
Approval	non ECE R65	Length	277.4mm
EMC Approval	EMC 10.03	Depth	146.2mm

5. Britax low profile mini LED light bar – A100.00.LDV



Overview

Item	Amber micro LED light bar with uncoloured lens and magnetic fixing
Category	Lightbar
Description	low profile mini lightbar. Uncoloured lens with amber LEDs. Magnetic fixing.
Key Features	<ul style="list-style-type: none"> High intensity LED end modules Double flash Waterproof design Low profile design High performance base Polycarbonate lenses Change .00 to .01 for blue version

Specifications

Part No.	A100.00.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Magnetic	Current draw at 24v	Peak 1.0A

Lens colour	Uncoloured		
Warranty	5 years	Height(incl magnet)	87.5mm
Approval	non ECE R65	Length	277.4mm
EMC Approval	EMC 10.03	Depth	68mm

6. Britax mini LED light bar – A451.00.LMV



Overview

Item	Amber mini LED light bar with amber lens and single bolt fitting
Category	Light bars
Description	Mini lightbar. Amber lens with amber LEDs. Single bolt fixing.
Key Features	LED 70 groups of 5 flashes per minute Water resistant design High performance base Polycarbonate lenses

Specifications

Part No.	A451.00.LMV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.48
Fitting method	Single bolt	Current draw at 24v	Peak 2.4A
Lens colour	Amber		
Warranty	5 years	Height	130mm

Approval	non ECE R65	Length	420mm
EMC Approval	EMC 10.03	Depth	205mm

7. Britax low profile mini LED light bar ECE R65 – A494.40.LDV



Overview

Item	Amber mini LED light bar with uncoloured lens and magnetic fixing
Category	Light bars
Description	R65 approved low profile mini lightbar. Uncoloured lens with amber Led's magnetic fixing.
Key Features	<p>High intensity LED double flash (120 per minute)</p> <p>Water resistant design</p> <p>Low profile design</p> <p>High performance base</p> <p>Polycarbonate lenses</p> <p>Also available in Amber (change.40 to .00)</p>

Specifications

Part No.	A494.40.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.0, Average 0.8 AMPS
Fitting method	Magnetic	Current draw at 24v	Peak 1.0, Average 0.5 AMPS
Lens colour	Uncoloured		

Warranty	5 years	Height(excl magnet)	94.7mm
Approval	ECE R65	Length	420mm
EMC Approval	EMC 2004/04/EC	Depth	205mm

8. Britax low profile mini LED light bar ECE R65 – A491.40.LDV



Overview

Item	Amber micro LED light bar with uncoloured lens and single bolt fitting
Category	Light bars
Description	R65 approved low profile mini lightbar. Uncoloured lens with amber Led's single bolt fixing.
Key Features	<p>High intensity LED double flash (120 per minute)</p> <p>Waterproof design</p> <p>Low profile design</p> <p>High performance base</p> <p>Polycarbonate lenses</p> <p>Also available in amber (change.40 to .00)</p>

Specifications

Part No.	A491.40.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Single bolt	Current draw at 24v	Peak 1.0A
Lens colour	Uncoloured		
Warranty	5 years	Height(incl bolt)	119.7mm

Approval	ECE R65	Length	420mm
EMC Approval	EMC 10.03	Depth	205mm

9. Britax low profile mini LED light bar ECE R65 – A491.00.LDV



Overview

Item	Amber mini LED light bar with amber lens and single bolt fitting
Category	Light bars
Description	R65 approved low profile mini lightbar. Amber lens with amber Led's single bolt fixing.
Key Features	<p>High intensity LED double flash (120 per minute)</p> <p>Water resistant design</p> <p>Low profile design</p> <p>High performance base</p> <p>Non-fading acrylic and polycarbonate lenses</p>

Specifications

Part No.	A491.00.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 3.6A
Fitting method	Single bolt	Current draw at 24v	Peak 1.8A
Lens colour	Amber		
Warranty	5 years	Height	119.7mm
Approval	ECE R65	Width	420mm

10. Britax low profile mini LED light bar – A481.00.LDV



Overview

Item	Amber micro LED light bar with amber lens and single bolt fitting
Category	Light bars
Description	low profile mini lightbar. Amber lens with amber Led's single bolt fixing.
Key Features	<ul style="list-style-type: none"> High intensity LED double flash Lights flash together Water resistant design Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A481.00.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Single bolt	Current draw at 24v	Peak 1.0A
Lens colour	Amber		
Warranty	5 years	Height	94.7mm
Approval	non ECE R65	Length	420mm

11. Britax low profile mini LED light bar ECE R65 – A494.00.LDV



Overview

Item	Amber mini LED light bar with Ambwe lens and magnetic fixing
Category	Light bars
Description	R65 approved low profile mini lightbar. Amber lens with amber Led's magnetic fixing.
Key Features	<p>High intensity LED double flash (120 per minute)Water resistant design</p> <p>Low profile design</p> <p>High performance base</p> <p>Polycarbonate lenses</p> <p>Also available in Uncoloured (change.00 to .40)</p>

Specifications

Part No.	A494.00.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Average 1.0 AMPS
Fitting method	Magnetic	Current draw at 24v	Average 0.5 AMPS
Lens colour	Amber		
Warranty	5 years	Height(excl magnet)	94.7mm
Approval	ECE R65	Length	420mm
EMC Approval	EMC 2004/04/EC	Depth	205mm

12. Britax Mini LED Lightbar REG65 – A521.00.LDV



Overview

Item	Amber mini LED light bar REG65 with amber lens and single bolt fitting
Category	Light bars
Description	Mini lightbar. Amber lens with amber LED's. Single bolt fixing 2 module
Key Features	High intensity LED end modules Double flash Standard Britax Areolite design no centre section Polycarbonate lenses Reverse polarity protected.

Specifications

Part No.	A521.00.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.04A
Fitting method	Single Bolt	Current draw at 24v	Peak 1.0A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	130mm
Approval	ECE Reg 65	Length	420mm
EMC Approval	EMC 10.04	Depth	205mm

13. Britax low profile mini LED light bar – A11706.002.DV



Overview

Item	Amber micro LED light bar with uncoloured lens and four bolt fitting
Category	Light bars
Description	low profile mini lightbar. Uncoloured lens with amber Led's four bolt fixing.
Key Features	<ul style="list-style-type: none"> High intensity LED multiple flash patterns Waterproof design Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A11706.002.DV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	
Fitting method	Single bolt	Current draw at 24v	
Lens colour	Amber		
Warranty	5 years	Height(incl magnet)	170mm
Approval	non ECE R65	Length	422mm
EMC Approval	EMC 10.03	Depth	67.5mm

14. Britax low profile mini LED light bar – A484.00.LDV



Overview

Item	Amber micro LED light bar with amber lens and magnetic fixing
Category	Light bars
Description	Low profile mini lightbar. Amber lens with amber Led's magnetic fixing.
Key Features	High intensity LED double flash Water resistant design Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A484.00.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.0
Fitting method	Magnetic	Current draw at 24v	Peak 1.0
Lens colour	Amber		
Warranty	5 years	Height(incl magnet)	138mm
Approval	non ECE R65	Length(to magnet base)	455mm
EMC Approval	EMC 10.03	Depth	205mm

15. Britax mini LED light bar – A454.00.LMV




Overview

Item	Amber mini LED light bar with amber lens and magnetic fixing
Category	Light bars
Description	Mini lightbar. Amber lens with amber LEDs. Magnetic fixing.
Key Features	70 groups of 5 flashes per minute Water resistant design High performance base Polycarbonate lenses

Specifications

Part No.	A454.00.LMV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	
Fitting method	Magnetic	Current draw at 24v	
Lens colour	Amber		
Warranty	5 years	Height(incl bracket)	170mm
Approval	non ECE R65	Length(to magnet base)	460mm
EMC Approval	EMC 10.03	Depth	205mm

16. Britax LED light bar 2 module – A6702.000.DV

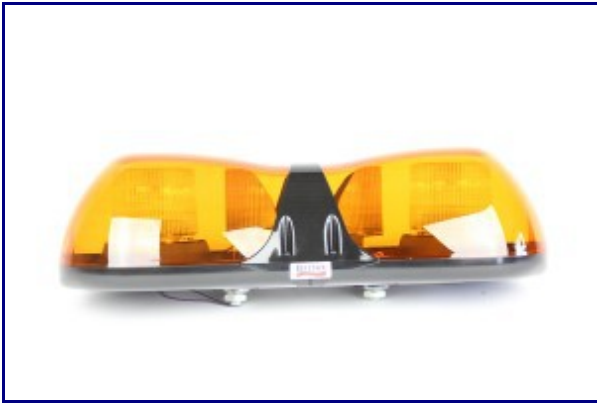

Overview

Item	Amber LED light bar 520mm
Category	Light bars
Description	LED light bar amber lens with no centre section. 2 modules
Key Features	High intensity LED end modules Water resistant design 70 groups of 5 flashes per minute High performance base Polycarbonate lenses

Specifications

Part No.	A6702.000.DV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	
Fitting method	Two bolt	Current draw at 24v	
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	Non ECE R65	Width	520mm
EMC Approval	EMC 10.03	Depth	200mm

17. Britax Aerolite LED light bar ECE R65 amber – A6602.000.LDV



Overview

Item	Amber LED light bar 520mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber LED's. Two bolt fixing 2 module
Key Features	High intensity LED end modules(also available in 4 module) Double flash Standard Britax Areolite design no centre section Polycarbonate lenses Reverse polarity protected.

Specifications

Part No.	A6602.000.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 5.4A
Fitting method	Two bolt	Current draw at 24v	Peak 2.7A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Length	520mm
Warranty	5 years	Height(when installed)	165mm
EMC Approval	EMC 10.03	Depth	200mm

18. Britax LED Aerolite light bar – A6712.200.LDV



Overview

Item	Amber LED light bar 750mm
Category	Light bars
Description	Aerolite light bar. Amber lens with illuminated centre section. Four bolt fixing
Key Features	<p>High intensity LED end modules</p> <p>2 modules per bar</p> <p>Water resistant design</p> <p>70 groups of 5 flashes per minute</p> <p>High performance base</p> <p>Replace .200.LDV with .100.DV for non illuminated centre section</p> <p>Polycarbonate lenses</p>

Specifications

Part No.	A6712.200.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 1.24AMPS
Fitting method	Four bolt	Current draw at 24v	Peak 1.2AMPS
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	Non ECE R65	Length	750mm

19. Britax LED Aerolite light bar – A6712.100.DV



Overview

Item	Amber LED light bar 750mm
Category	Light bars
Description	Aerolite light bar. Amber lens with non illuminated centre section. Four bolt fixing
Key Features	<p>High intensity LED end modules</p> <p>2 modules per bar</p> <p>Water resistant design</p> <p>70 groups of 5 flashes per minute</p> <p>High performance base</p> <p>For illuminated centre section replace .100 with .200</p> <p>Polycarbonate lenses</p>

Specifications

Part No.	A6712.100.DV	Voltage	Dual Voltage
Brand	Britax	Current draw at 12v	Peak 1.24 AMPS
Fitting method	Four bolt	Current draw at 24v	Peak 1.2 AMPS
Lens colour	Amber		

Warranty	5 years	Height(when installed)	165mm
Approval	Non ECE R65	Length	750mm
EMC Approval	10.03	Depth	200mm

20. Britax Aerolite LED light bar ECE R65 amber – A6612.200.LDV



Overview

Item	Amber LED light bar 750mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber LED's. Four bolt fixing lit centre
Key Features	<p>High intensity LED end modules</p> <p>Double flash</p> <p>Standard Britax Aerolite design with illuminated centre section</p> <p>Polycarbonate lenses</p> <p>Reverse polarity protected.</p>

Specifications

Part No.	A6612.200.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 4.5A
Fitting method	Four bolt	Current draw at 24v	Peak 3.0A
Lens colour	Amber		
Warranty	5 years	Height(when	165mm

installed)

Approval	ECE Reg 65	Length	750mm
EMC Approval	EMC 10.03	Depth	200mm

21. Britax Aerolite LED light bar ECE R65 amber – A6612.100.DV



Overview

Item	Amber LED light bar 750mm
Category	Light bars
Description	R65 approved Aerolite lightbar. Amber lens with amber LED's. Four bolt fixing lit centre
Key Features	High intensity LED end modules – 2 module Double flash Standard Britax Aerolite design with illuminated centre section Polycarbonate lenses Reverse polarity protected.

Specifications

Part No.	A6612.100.DV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 4.5A
Fitting method	Four bolt	Current draw at 24v	Peak 3.0A
Lens colour	Amber		

Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Length	750mm
EMC Approval	EMC 10.03	Depth	200mm

22. Britax low profile LED light bar ECE R65 A13720.040.DV



Overview

Item	Uncoloured LED light bar 770mm
Category	Light bars
Description	Low profile light bar. Uncoloured lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules 12 modules per bar Water resistant design Double flash. 120 flashes per minute Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A13720.040.DV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Uncoloured		

Warranty	5 years	Height(when installed)	113mm
Approval	ECE Reg 65	Length	770mm
EMC Approval	EMC 10.03	Depth	200mm

23. Britax low profile LED light bar ECE R65 A13720.000.DV



Overview

Item	Amber LED light bar 770mm
Category	Light bars
Description	Low profile lightbar. Amber lens with amber Led's four bolt fixing
Key Features	<p>High intensity LED</p> <p>Water resistant design</p> <p>Double flash 120 flashes per minute</p> <p>Low profile design</p> <p>High performance base</p> <p>Polycarbonate lenses</p>

Specifications

Part No.	A13720.000.DV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.5A
Fitting method	Four bolt	Current draw at 24v	Peak 1.4A
Lens colour	Amber		
Warranty	5 years	Height	105mm when installed
Approval	ECE R65	Length	770mm

24. Britax low profile LED light bar A13722.000.LDV



Overview

Item	Amber LED light bar 770mm
Category	Light bars
Description	Low profile lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules Water resistant design 70 flashes per minute Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A13722.000.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Warranty	5 years	Height(when installed)	105mm
Approval	Non Reg 65	Length	770mm
EMC Approval	EMC 10.03	Depth	200mm

25. Britax low profile LED light bar A13722.040.LDV



Overview

Item	Uncoloured LED light bar 770mm
Category	Light bars
Description	Low profile lightbar. Uncoloured lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules Water resistant design 70 flashes per minute Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A13722.040.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.0
Fitting method	Four bolt	Current draw at 24v	Peak 1.0
Lens colour	Uncoloured		
Warranty	5 years	Height(when installed)	113mm
Approval	Non Reg 65	Length	770mm
EMC Approval	EMC 10.03	Depth	200mm

26. Britax LED Aerolite light bar – A6724.000.DV



Overview

Item	Amber LED light bar 770mm
Category	Light bars
Description	Aerolite light bar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules 4 modules per bar Waterproof design 70 groups of 5 flashes per minute High performance base Polycarbonate lenses

Specifications

Part No.	A6724.000.DV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	
Fitting method	Four bolt	Current draw at 24v	
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	Non ECE R65	Length	770mm
EMC Approval	10.03	Depth	200mm

27. Britax Aerolite LED light bar ECE R65 amber – A6624.000.LDV



Overview

Item	Amber LED light bar 770mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules Double flash Standard Britax Areolite design. Non-illuminated centre Polycarbonate lenses Reverse polarity protected.

Specifications

Part No.	A6624.000.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 9.00A
Fitting method	Four bolt	Current draw at 24v	Peak 6.00A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Length	770mm
EMC Approval	EMC 10.03	Depth	200mm

28. Britax low profile LED light bar ECE R65 A13730.240.DV



Overview

Item	Uncoloured LED light bar 1000mm
Category	Light bars
Description	Low profile lightbar. Uncoloured lens. Four bolt fixing.
Key Features	High intensity LED end modules
	16 modules per bar
	Water resistant design
	Double flash. 120 flashes per minute
	Low profile design
	High performance base
	Polycarbonate lenses

Specifications

Part No.	A13730.240.DV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Uncoloured		
Warranty	5 years	Height(when installed)	113mm
Approval	ECE Reg 65	Length	1000mm

29. Britax low profile LED light bar ECE R65 A13730.200.DV



Overview

Item	Uncoloured LED light bar 1000mm
Category	Light bars
Description	Low profile lightbar. Amber lens with amber LEDs. Four bolt fixing.
Key Features	High intensity LED end modules 16 modules per bar Water resistant design Double flash. 120 flashes per minute Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A13730.200.DV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	113mm
Approval	REG65	Length	1000mm

30. Britax low profile LED light bar ECE R65 A13730.140.DV



Overview

Item	Uncoloured LED light bar 1000mm
Category	Light bars
Description	Low profile lightbar. Uncoloured lens with amber LEDs. Four bolt fixing. No led in centre section
Key Features	<p>High intensity LED end modules</p> <p>16 modules per bar</p> <p>Water resistant design</p> <p>Double flash. 120 flashes per minute</p> <p>Low profile design</p> <p>High performance base</p> <p>Polycarbonate lenses</p>

Specifications

Part No.	A13730.140.DV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Uncoloured		
Warranty	5 years	Height(when installed)	113mm

Approval	ECE Reg 65	Length	1000mm
EMC Approval	EMC 10.03	Depth	200mm

31. Britax low profile LED light bar REG65 A13730.100.DV



Overview

Item	Amber LED light bar 1000mm
Category	Light bars
Description	Low profile lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules 12 modules per bar Waterproof design Double flash 120 flashes per minute Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A13730.100.DV	Voltage	12 and 24 voltage
Brand	Britax	Current draw at 12v	Peak 2.0, Average 1.0 AMPS
Fitting method	Four bolt	Current draw at 24v	Peak 1.0, Average 0.5 AMPS
Lens colour	Amber		
Warranty	5 years	Height(when installed)	113mm
Approval	ECE Regulation 65	Length	1000mm
EMC Approval	EMC 10.03	Depth	200mm

32. Britax low profile LED light bar A13732.100.LDV



Overview

Item	Amber LED light bar 1000mm
Category	Light bars
Description	Low profile lightbar. Amber lens with amber Led's four bolt fixing
Key Features	High intensity LED 12 modules per bar Water resistant design 70 groups of 5 flashes per minute Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A13732.100.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Amber		
Warranty	5 years	Height	113mm when installed
Approval	Non Regulation 65	Width	1000mm
EMC Approval	EMC 10.03	Depth	200mm

33. Britax Aerolite LED ‘Specialist’ light bar ECE R65 amber – A6637.100.LDV



Overview

Item	Amber LED light bar 1000mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber LED's. Four bolt fixing
Key Features	High intensity LED end modules 4 x L52 type LED warning modules, 2 front facing, 2 rear facing Double flash Standard Britax Aerolite design with non-illuminated centre section Polycarbonate lenses Reverse polarity protected.

Specifications

Part No.	A6637.100.LDV	Voltage	12 or 24VDC
Brand	Britax	Current draw at 12v	Peak 5.8A
Fitting method	Four bolt	Current draw at 24v	Peak 2.9A
Lens colour	Amber		
Warranty	will find out	Height(when installed)	165mm
Approval	ECE Regulation 65	Length	1000mm
EMC Approval	EMC 10.03	Depth	200mm

34. Britax Aerolite LED light bar ECE R65 amber – A6642.200.LDV



Overview

Item	Amber LED light bar 1000mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules Double flash Standard Britax Aerolite design with LED illuminated centre section Polycarbonate lenses Reverse polarity protected.

Specifications

Part No.	A6642.200.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 4.5A
Fitting method	Four bolt	Current draw at 24v	Peak 3.00A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Width	1000mm
EMC Approval	EMC 10.03	Depth	200mm

35. Britax Aerolite LED light bar ECE R65 amber – A6642.100.LDV



Overview

Item	Amber LED light bar 1000mm
Category	Light bars
Description	R65 approved Aerolite lightbar. Amber lens with non illuminated centre section. Four bolt fixing
Key Features	High intensity LED end modules – 2 module Double flash Standard Britax Areolite design with non illuminated centre section Polycarbonate lenses Reverse polarity protected. For illuminated centre section replace .100 with .200

Specifications

Part No.	A6642.100.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 4.5A
Fitting method	Four bolt	Current draw at 24v	Peak 3.00A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Width	1000mm
EMC Approval	EMC 10.03	Depth	200mm

36. Britax Aerolite LED light bar ECE R65 amber – A6634.200.LDV



Overview

Item	Amber LED light bar 1000mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules Double flash Standard Britax Aerolite design with illuminated centre section Polycarbonate lenses Reverse polarity protected.

Specifications

Part No.	A6634.200.LDV	Voltage	13-30V
Brand	Britax	Current draw at 12v	Peak 9.00A
Fitting method	Four bolt	Current draw at 24v	Peak 6.00A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Length	1000mm
EMC Approval	EMC 10.03	Depth	200mm

37. Britax Aerolite LED light bar ECE R65 amber – A6634.100.LDV



Overview

Item	Amber LED light bar 1000mm
Category	Light bars
Description	R65 approved Aerolite lightbar. Amber lens with no LED centre section. Four bolt fixing
Key Features	High intensity LED end modules – 4 module Double flash Standard Britax Aerolite design without illuminated centre section Polycarbonate lenses Reverse polarity protected. For illuminated centre section replace .100 with .200

Specifications

Part No.	A6634.100.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 9.00A
Fitting method	Four bolt	Current draw at 24v	Peak 6.00A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Length	1000mm
EMC Approval	EMC 10.03	Depth	200mm

38. Britax Aerolite LED light bar A6742.100.DV



Overview

Item	Amber LED light bar 1000mm. 2 Modules
Category	Light bars
Description	Aerolite LED lightbar. Amber lens with illuminated centre section. Four bolt fixing
Key Features	High intensity LED end modules Water resistant design 70 groups of 5 flashes per minute Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A6742.100.DV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 1.24 AMPS
Fitting method	Four bolt	Current draw at 24v	Peak 1.2 AMPS
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	Non ECE REgulation 65	Length	1000mm

39. Britax Aerolite LED light bar ECE R65 A6742.200.LDV



Overview

Item	Amber LED light bar 1000mm. 2 Modules
Category	Light bars
Description	Aerolite LED lightbar. Amber lens with illuminated centre section. Four bolt fixing
Key Features	<p>High intensity LED end modules</p> <p>Water resistant design</p> <p>70 groups of 5 flashes per minute</p> <p>Low profile design</p> <p>High performance base</p> <p>Polycarbonate lenses</p>

Specifications

Part No.	A6742.200.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 4.5 AMPS
Fitting method	Four bolt	Current draw at 24v	Peak 3 AMPS
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm

Approval	ECE REgulation 65	Length	1000mm
EMC Approval	EMC 10.03	Depth	200mm

40. Britax low profile mini LED light bar ECE R65 – A514.00.LDV.KIT



Overview

Item	Amber micro LED light bar with amber lens and magnetic fitting and free carry case
Category	Light bars
Description	R65 approved Low profile micro lightbar. Amber lens with clear Led's magnetic fixing and free carry case
Key Features	<ul style="list-style-type: none"> High intensity LED Waterproof design 23 selectable flash patterns Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A514.00.LDV.KIT	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 4.2A
Fitting method	Magnetic	Current draw at 24v	Peak 1.05A
Lens colour	Amber		

Warranty	5 years	Height(incl magnets)	50mm
Approval	ECE R65	Length	248mm
EMC Approval	EMC 10.03	Depth	172mm

41. Britax Aerolite LED light bar – A6734.200.LDV



Overview

Item	Amber LED light bar 1000mm. 4 Modules
Category	Light bars
Description	Aerolite LED lightbar. Amber lens with illuminated centre section. Four bolt fixing
Key Features	<p>High intensity LED end modules</p> <p>Water resistant design</p> <p>70 groups of 5 flashes per minute</p> <p>Replace .200 with .100.DV for non illuminative centre section</p> <p>Replace .LDV with 24V for alternative voltage</p> <p>High performance base</p> <p>Polycarbonate lenses</p>

Specifications

Part No.	A6734.200.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.48 AMPS

Fitting method	Four bolt	Current draw at 24v	Peak 2.4 AMPS
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	Non ECE Reg 65	Length	1000mm
EMC Approval	EMC 10.03	Depth	200mm

42. Britax Aerolite LED light bar – A6734.100.DV



Overview

Item	Amber LED light bar 1000mm. 4 Modules
Category	Light bars
Description	Aerolite LED lightbar. Amber lens with non illuminated centre section. Four bolt fixing
Key Features	<p>High intensity LED end modules</p> <p>Waterproof design</p> <p>70 groups of 5 flashes per minute</p> <p>Replace .100.DV with .200.12V for illuminative centre section</p> <p>High performance base</p> <p>Polycarbonate lenses</p>

Specifications

Part No.	A6734.200.DV	Voltage	Dual voltage
-----------------	--------------	----------------	--------------

Brand	Britax	Current draw at 12v	Peak 2.48 AMPS
Fitting method	Four bolt	Current draw at 24v	Peak 2.4 AMPS
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	Non ECE Reg 65	Length	1000mm
EMC Approval	EMC 10.03	Depth	200mm

43. Britax Aerolite LED light bar ECE R65 amber – A6654.100.LDV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars
Description	R65 approved Aerolite lightbar. Amber lens with non illuminated centre section. Four bolt fixing
Key Features	High intensity LED end modules – 4 module Double flash Standard Britax Aerolite design with non illuminated centre section Polycarbonate lenses Reverse polarity protected. For illuminated centre section replace .100 with .200

Specifications

Part No.	A6654.100.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 9.00A
Fitting method	Four bolt	Current draw at 24v	Peak 6.00A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

44. Britax Aerolite LED light bar ECE R65 amber – A6662.100.LDV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with non illuminated centre section. Four bolt fixing
Key Features	High intensity LED end modules Double flash Standard Britax Areolite design with non illuminated centre section Polycarbonate lenses Reverse polarity protected.

For illuminated centre section replace .100 with .200

Specifications

Part No.	A6662.100.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 4.5
Fitting method	Four bolt	Current draw at 24v	Peak 3.00A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

45. Britax Aerolite LED light bar ECE R65 amber – A6654.200.LDV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules Double flash Standard Britax Aerolite design with illuminated centre section Polycarbonate lenses Reverse polarity protected.

Specifications

Part No.	A6654.200.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 9.00A
Fitting method	Four bolt	Current draw at 24v	Peak 6.00A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

46. Britax Aerolite LED 'Recovery' light bar ECE R65 amber – A6656.300.LDV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber Led's four bolt fixing
Key Features	High intensity LED 2 modules per bar Double flash Standard Britax Areolite design with illuminated centre section LED stop/tail, LED direction indicators and LED externally mounted work lamps Non-fading acrylic and polycarbonate lenses Reverse polarity protected.

Specifications

Part No.	A6656.300.LDV	Voltage	12-24VDC
Brand	Britax	Current draw at 12v(including inner modules and external lamps)	Peak 7.4A
Fitting method	Four bolt	Current draw at 24v(including inner modules and external lamps)	Peak 4.7A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Regulation 65	Width	1250mm
EMC Approval	EMC 10.03	Depth(to end of work lamps)	272mm

47. Britax Aerolite LED ‘Specialist’ light bar ECE R65 amber – A6657.100.LDV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	<p>High intensity LED end modules</p> <p>4 x L52 type LED warning modules, 2 front facing, 2 rear facing</p> <p>Double flash</p> <p>Standard Britax Areolite design with non-illuminated centre section</p>

Polycarbonate lenses
Reverse polarity protected.

Specifications

Part No.	A6657.100.LDV	Voltage	12-24VDC
Brand	Britax	Current draw at 12v(including inner modules)	Peak 5.8A
Fitting method	Four bolt	Current draw at 24v(including inner modules)	Peak 2.9A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Regulation 65	Width	1250mm
EMC Approval	EMC 10.03	Depth	200mm

48. Britax Aerolite LED light bar ECE R65 amber – A6662.200.LDV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules Double flash

Standard Britax Areolite design with illuminated centre section

Polycarbonate lenses

Reverse polarity protected.

Specifications

Part No.	A6662.200.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 4.5
Fitting method	Four bolt	Current draw at 24v	Peak 3.00A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

49. Britax LED light bar 2 module – A6762.100.DV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars
Description	LED light bar amber lens with non illuminated centre section. 2 modules
Key Features	High intensity LED end modules Water resistant design

70 groups of 5 flashes per minute

High performance base

Polycarbonate lenses

Sign plate options available on request

Specifications

Part No.	A6762.100.DV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 1.24 AMPS
Fitting method	Four bolt	Current draw at 24v	Peak 1.2 AMPS
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	Non ECE R65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

50. Britax LED light bar 2 module – A6762.200.LDV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars
Description	LED light bar amber lens with LED centre section. 2 modules
Key Features	High intensity LED end modules

Water resistant design

70 groups of 5 flashes per minute

High performance base

Polycarbonate lenses

For non illuminated centre replace .200.LDV with .100.DV

Sign plate options available on request

Specifications

Part No.	A6762.200.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 1.24 AMPS
Fitting method	Four bolt	Current draw at 24v	Peak 1.2 AMPS
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	Non ECE R65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

51. Britax low profile LED light bar ECE R65 A13750.100.DV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars

Description	Low profile lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules
	12 modules per bar
	Water resistant design
	Double flash. 120 flashes per minute
	Low profile design
	High performance base
	Polycarbonate lenses

Specifications

Part No.	A13750.100.DV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	113mm
Approval	ECE Reg 65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

52. Britax low profile LED light bar ECE R65 A13750.140.DV



Overview

Item	Uncoloured LED light bar 1250mm
Category	Light bars
Description	Low profile lightbar. Uncoloured lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules 12 modules per bar Water resistant design Double flash. 120 flashes per minute Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A13750.140.DV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0, Average 1.0
Fitting method	Four bolt	Current draw at 24v	Peak 1.0, Average 0.5
Lens colour	Clear		
Warranty	5 years	Height(when installed)	113mm
Approval	ECE Reg 65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

53. Britax low profile LED light bar ECE R65 A13750.200.DV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars
Description	Low profile light bar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules 16 modules per bar Water resistant design Double flash. 120 flashes per minute Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A13750.200.DV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	113
Approval	ECE Reg 65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

54. Britax low profile LED light bar ECE R65 A13750.240.DV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars
Description	Low profile lightbar. Uncoloured lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules
	16 modules per bar
	Water resistant design
	Double flash. 120 flashes per minute
	Low profile design
	High performance base
	Polycarbonate lenses

Specifications

Part No.	A13750.240.DV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Uncoloured		
Warranty	5 years	Height(when installed)	113mm
Approval	ECE Reg 65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

55. Britax low profile LED light bar A13752.100.LDV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars
Description	Low profile light bar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules
	Water resistant design
	12 modules per lightbar
	70 groups of 5 flashes per minute
	Low profile design
	High performance base
	Polycarbonate lenses

Specifications

Part No.	A13752.100.LDV	Voltage	10-30V Specify voltage
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	113mm
Approval	Non ECE Reg 65	Length	1250mm

56. Britax low profile LED light bar A13752.140.LDV



Overview

Item	Uncoloured LED light bar 1250mm
Category	Light bars
Description	Low profile light bar. Uncoloured lens with amber LEDs. Four bolt fixing
Key Features	<p>High intensity LED end modules</p> <p>Water resistant design</p> <p>70 groups of 5 flashes per minute</p> <p>Low profile design</p> <p>High performance base</p> <p>Polycarbonate lenses</p>

Specifications

Part No.	A13752.140.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0
Fitting method	Four bolt	Current draw at 24v	Peak 1.0
Lens colour	Uncoloured		
Warranty	5 years	Height(when installed)	113mm
Approval	Non Reg 65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

57. Britax low profile LED light bar A13752.200.LDV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars
Description	Low profile light bar. Amber lens. Four bolt fixing. Illuminated centre section
Key Features	High intensity LED end modules
	Water resistant design
	20 modules per lightbar
	70 Groups of 5 flashes per minute
	Low profile design
	High performance base
	Polycarbonate lenses

Specifications

Part No.	A13752.200.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 1.5A
Fitting method	Four bolt	Current draw at 24v	Peak 0.75A
		With Centre section	Peak 3.0A
Lens colour	Amber	Current draw at 12v	Peak 1.5A
		Current draw at 24v	
Warranty	5 years	Height(when installed)	111mm

Approval	Non ECE Reg 65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

58. Britax low profile LED light bar A13752.240.LDV



Overview

Item	Uncoloured LED light bar 1250mm
Category	Light bars
Description	Low profile light bar. Uncoloured lens with amber LEDs. Four bolt fixing
Key Features	<ul style="list-style-type: none"> High intensity LED end modules 20 modules per bar Water resistant design 70 groups of 5 flashes per minute Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A13752.240.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v With centre section	Peak 3.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.5A

With centre section

Lens colour	Uncoloured		
Warranty	5 years	Height(when installed)	113mm
Approval	Non Reg 65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

59. Britax LED light bar 4 module – A6754.200.LDV



Overview

Item	Amber LED light bar 1250mm
Category	Light bars
Description	LED light bar amber lens with LED centre section. 4 modules
Key Features	High intensity LED end modules Water resistant design 70 groups of 5 flashes per minute High performance base Polycarbonate lenses For non illuminated centre replace .200.LDV with .100.DV Sign plate options available on request

Specifications

Part No.	A6754.200.LDV	Voltage	Dual voltage
-----------------	---------------	----------------	--------------

Brand	Britax	Current draw at 12v	Peak 2.48 AMPS
Fitting method	Four bolt	Current draw at 24v	Peak 2.4 AMPS
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	Non ECE R65	Length	1250mm
EMC Approval	EMC 10.03	Depth	200mm

60. Britax Aerolite LED 'Recovery' light bar ECE R65 amber – A6676.300.LDV



Overview

Item	Amber LED light bar 1500mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber LED's. Four bolt fixing
Key Features	High intensity LED end modules
	Double flash
	Standard Britax Areolite design with illuminated centre section
	LED stop/tail, LED direction indicators and LED externally mounted work lamps
	Polycarbonate lenses
	Reverse polarity protected.

Specifications

Part No.	A6676.300.LDV	Voltage	12-24VDC
-----------------	---------------	----------------	----------

Brand	Britax	Current draw at 12v(including inner modules and external lamps)	Peak 7.4A
Fitting method	Four bolt	Current draw at 24v(including inner modules and external lamps)	Peak 4.7A
Lens colour	Amber		
Warranty	5 years	Height(When Installed)	165mm
Approval	ECE Regulation 65	Length	1500mm
EMC Approval	EMC 10.03	Depth(to end of work lamps)	272mm

61. Britax Aerolite LED ‘Specialist’ light bar ECE R65 amber- A6677.100.LDV



Overview

Item	Amber LED light bar 1500mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber LED’s. Four bolt fixing
Key Features	High intensity LED end modules 4 x L52 type LED warning modules, 2 front facing, 2 rear facing Double flash Standard Britax Areolite design with non-illuminated centre section

Polycarbonate lenses
Reverse polarity protected.

Specifications

Part No.	A6677.100.LDV	Voltage	12-24VDC
Brand	Britax	Current draw at 12v(including inner modules)	Peak 11.2A
Fitting method	Four bolt	Current draw at 24v(including inner modules)	Peak 5.6A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Regulation 65	Length	1500mm
EMC Approval	EMC 10.03	Depth	200mm

62. Britax low profile LED light bar ECE R65 A13770.100.DV



Overview

Item	Amber LED light bar 1500mm
Category	Light bars
Description	Low profile lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules 12 modules per bar

Water resistant design
 Double flash. 120 flashes per minute
 Low profile design
 High performance base
 Polycarbonate lenses

Specifications

Part No.	A13770.100.DV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	113mm
Approval	ECE Reg 65	Length	1500mm
EMC Approval	EMC 10.03	Depth	200mm

63. Britax low profile LED light bar ECE R65 A13770.140.DV



Overview

Item	Uncoloured light bar 1500mm
Category	Light bars
Description	Low profile lightbar. Uncoloured lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules

12 modules per bar
 Water resistant design
 Double flash. 120 flashes per minute
 Low profile design
 High performance base
 Polycarbonate lenses

Specifications

Part No.	A13770.140.DV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Uncoloured		
Warranty	5 years	Height(when installed)	113mm
Approval	ECE Reg 65	Length	1500mm
EMC Approval	EMC 10.03	Depth	200mm

64. Britax low profile LED light bar ECE R65 A13770.200.DV



Overview

Item Amber LED light bar 1500mm

Category	Light bars
Description	Low profile light bar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules 20 modules per bar Water resistant design Double flash. 120 flashes per minute Low profile design with illuminated centre High performance base polycarbonate lenses

Specifications

Part No.	A13770.200.DV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0, Average 1.0 AMPS
Fitting method	Four bolt	Current draw at 24v	Peak 1.0, Average 0.5 AMPS
Lens colour	Amber		
Warranty	5 years	Height(when installed)	113mm
Approval	ECE Reg 65	Length	1500mm
EMC Approval	EMC 10.03	Depth	200mm

65. Britax low profile LED light bar ECE R65 A13770.240.DV



Overview

Item	Uncoloured LED light bar 1500mm
Category	Light bars
Description	Low profile lightbar. Uncoloured lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules 20 modules per bar Water resistant design Double flash. 120 flashes per minute Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A13770.240.DV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0, Average 1.0 AMPS
Fitting method	Four bolt	Current draw at 24v	Peak 1.0, Average 0.5 AMPS
Lens colour	Uncoloured		
Warranty	5 years	Height(when installed)	113mm
Approval	ECE Reg 65	Length	1500mm
EMC Approval	EMC 10.03	Depth	200mm

66. Britax low profile LED light bar A13772.100.LDV



Overview

Item	Amber LED light bar 1500mm
Category	Light bars
Description	Low profile lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules
	12 modules per bar
	Water resistant design
	70 groups of 5 flashes per minute
	Low profile design
	High performance base
	Polycarbonate lenses

Specifications

Part No.	A13772.100.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	113mm
Approval	Non Reg 65	Length	1500mm

67. Britax low profile LED light bar A13772.140.LDV



Overview

Item	Uncoloured LED light bar 1500mm
Category	Light bars
Description	Low profile lightbar. Uncoloured lens with amber LEDs. Four bolt fixing
Key Features	<ul style="list-style-type: none"> High intensity LED end modules 12 modules per bar Water resistant design 70 groups of 5 flashes per minute Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A13772.140.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Uncoloured		
Warranty	5 years	Height(when installed)	113mm

Approval	Non Reg 65	Length	1500mm
EMC Approval	EMC 10.03	Depth	200mm

68. Britax low profile LED light bar A13772.200.LDV



Overview

Item	Amber LED light bar 1500mm
Category	Light bars
Description	Low profile lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	<p>High intensity LED end modules</p> <p>24 modules per bar</p> <p>Water resistant design</p> <p>70 groups of 5 flashes per minute</p> <p>Low profile design</p> <p>High performance base</p> <p>Polycarbonate lenses</p>

Specifications

Part No.	A13772.200.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 4.0A
Fitting method	Four bolt	Current draw at 24v	Peak 2.0A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	113mm

Approval	Non Reg 65	Length	1500mm
EMC Approval	EMC 10.03	Depth	200mm

69. Britax low profile LED light bar A13772.240.LDV



Overview

Item	Uncoloured LED light bar 1500mm
Category	Light bars
Description	Low profile lightbar. Uncoloured lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules 24 modules per bar Water resistant design 70 groups of 5 flashes per minute Low profile design High performance base Polycarbonate lenses

Specifications

Part No.	A13772.240.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 4.0A
Fitting method	Four bolt	Current draw at 24v	Peak 2.0A
Lens colour	Uncoloured		
Warranty	5 years	Height(when installed)	113mm
Approval	Non Reg 65	Length	1500mm
EMC Approval	EMC 10.03	Depth	200mm

70. Britax Aerolite LED light bar ECE R65 amber – A6674.200.LDV



Overview

Item	Amber LED light bar 1500mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED end modules Double flash Standard Britax Areolite design with illuminated centre section Polycarbonate lenses Reverse polarity protected.

Specifications

Part No.	A6674.200.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 9.00A
Fitting method	Four bolt	Current draw at 24v	Peak 6.00A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Length	1500mm
EMC Approval	EMC 10.03	Depth	200mm

71. Britax Aerolite LED light bar ECE R65 amber – A6682.100.LDV



Overview

Item	Amber LED light bar 1500mm
Category	Light bars
Description	R65 approved Aerolite lightbar. Amber lens with non illuminated centre section. Four bolt fixing
Key Features	High intensity LED 2 end modules Double flash Standard Britax Areolite design with non illuminated centre section Polycarbonate lenses Reverse polarity protected. For illuminated centre section replace .100 with .200

Specifications

Part No.	A6682.100.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 4.5A
Fitting method	Four bolt	Current draw at 24v	Peak 3.00A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Length	1500mm
EMC Approval	EMC 10.03	Depth	200mm

72. Britax Aerolite LED light bar ECE R65 amber – A6682.200.LDV



Overview

Item	Amber LED light bar 1500mm
Category	Light bars
Description	Aerolite lightbar. Amber lens with amber LEDs. Four bolt fixing
Key Features	High intensity LED 2 end modules Double flash Standard Britax Areolite design with illuminated centre section Polycarbonate lenses Reverse polarity protected.

Specifications

Part No.	A6682.200.LDV	Voltage	12 and 24 Specify voltage
Brand	Britax	Current draw at 12v	Peak 4.5A
Fitting method	Four bolt	Current draw at 24v	Peak 3.00A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	ECE Reg 65	Length	1500mm
EMC Approval	EMC 10.03	Depth	200mm

73. Britax LED light bar 4 module – A6774.100.DV



Overview

Item	Amber LED light bar 1500mm
Category	Light bars
Description	LED light bar, amber lens. No LED centre section. 4 modules
Key Features	High intensity LED end modules Water resistant design 70 groups of 5 flashes per minute High performance base Polycarbonate lenses For illuminated centre replace .100.DV with .200.LDV Sign plate options available on request

Specifications

Part No.	A6774.100.DV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.48 AMPS
Fitting method	Four bolt	Current draw at 24v	Peak 2.4 AMPS
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	Non ECE R65	Length	1500mm
EMC Approval	EMC 10.03	Depth	200mm

74. Britax LED light bar 4 module – A6774.200.LDV



Overview

Item	Amber LED light bar 1500mm
Category	Light bars
Description	LED light bar, amber lens with LED centre section. 4 modules
Key Features	High intensity LED end modules Water resistant design 70 groups of 5 flashes per minute High performance base Polycarbonate lenses For non illuminated centre replace .200.LDV with .100.DV Sign plate options available on request

Specifications

Part No.	A6774.200.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	Peak 2.48 AMPS
Fitting method	Four bolt	Current draw at 24v	Peak 2.4 AMPS
Lens colour	Amber		
Warranty	5 years	Height(when installed)	165mm
Approval	Non ECE R65	Length	1500mm

75. Britax LED light bar 4 module – A6782.200.LDV



Overview

Item	Amber LED light bar 1500mm
Category	Light bars
Description	LED lightbar amber lens with LED centre section. 2 modules
Key Features	<p>High intensity LED</p> <p>Water resistant design</p> <p>70 groups of 5 flashes per minute</p> <p>High performance base</p> <p>Polycarbonate lenses</p> <p>For non illuminated centre replace .200.LDV with .100.DV</p> <p>Sign plate options available on request</p>

Specifications

Part No.	A6782.200.LDV	Voltage	Dual voltage
Brand	Britax	Current draw at 12v	
Fitting method	Four bolt	Current draw at 24v	
Lens colour	Amber		
Warranty	5 years	Height(when installed)	140mm

Approval	Non ECE R65	Length	1500mm
EMC Approval	EMC 10.03	Depth	200mm

76. Britax low profile LED light bar A13732.200.LDV



Overview

Item	Amber LED light bar 1000mm
Category	Light bars
Description	Low profile lightbar. Amber lens with amber Led's four bolt fixing
Key Features	<p>High intensity LED 16 modules per bar</p> <p>Water resistant design</p> <p>70 groups of 5 flashes per minute</p> <p>Low profile design</p> <p>High performance base</p> <p>Non-fading acrylic and polycarbonate lenses</p>

Specifications

Part No.	A13732.200.LDV	Voltage	10-30V
Brand	Britax	Current draw at 12v	Peak 2.0A
Fitting method	Four bolt	Current draw at 24v	Peak 1.0A
Lens colour	Amber		
Warranty	5 years	Height(when installed)	113mm
Approval	Non ECE Regulation 65	Length	1000mm
EMC Approval	EMC 10.03	Depth	200mm